



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 :

A61F 13/00

A1

(11) International Publication Number:

WO 00/30579

(43) International Publication Date:

2 June 2000 (02.06.00)

(21) International Application Number: PCT/US99/26298

(22) International Filing Date: 5 November 1999 (05.11.99)

(30) Priority Data:

60/109,701	24 November 1998 (24.11.98)	US
09/206,885	8 December 1998 (08.12.98)	US

(71)(72) Applicant and Inventor: SCHROEDER, Mark, R.
[US/US]; 47 Hilbury, Houston, TX 77024 (US).(74) Agents: VADEN, Frank, S., III et al.; Felsman, Bradley, Vaden,
Gunter & Dillon, LLP, Suite 1100, One Riverway, Houston,
TX 77056-1920 (US).

(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: PACKAGING FOR ADHESIVE-BANDAGE TO ALLOW ONE-HANDED APPLICATION

(57) Abstract

A packaged article including an adhesive-sided article (1), such as an adhesive bandage, a release paper (13) facing the adhesive side (3) thereof, and packaging top support (4) and bottom backing (9) sheets. The facing surfaces of the top support (4) and bottom backing (9) sheets peripherally surrounding the adhesive-sided article (1) have cohesive surfaces (6, 7 and 10). An adhesive strip, preferably a double-sided adhesive strip (5), attaches the non-adhesive side (2) of the adhesive-sided article (1) to the top support sheet (4). Relative strength adhesives and cohesives are employed so that the bottom sheet (9) and top sheet (4) are first separated to leave the top sheet (4) and adhesive-sided article (1) together. The top sheet (4) is used as an applicator for placing the article (1) onto a target surface (20), such as a patient's skin. The cohesive surface (6, 7) of the top sheet (4) surrounding the article (1) does not adhere to the target surface (20). At the time, however, the top sheet "pops up" from the article (1) now adhered in place. The top sheet (4) is then removed by breaking the bond of the adhesive strip (5). All of this is conveniently done with one hand. A method of making the package and a convenient assemblage of packages similar to a matchbook assemblage (17) is also included.

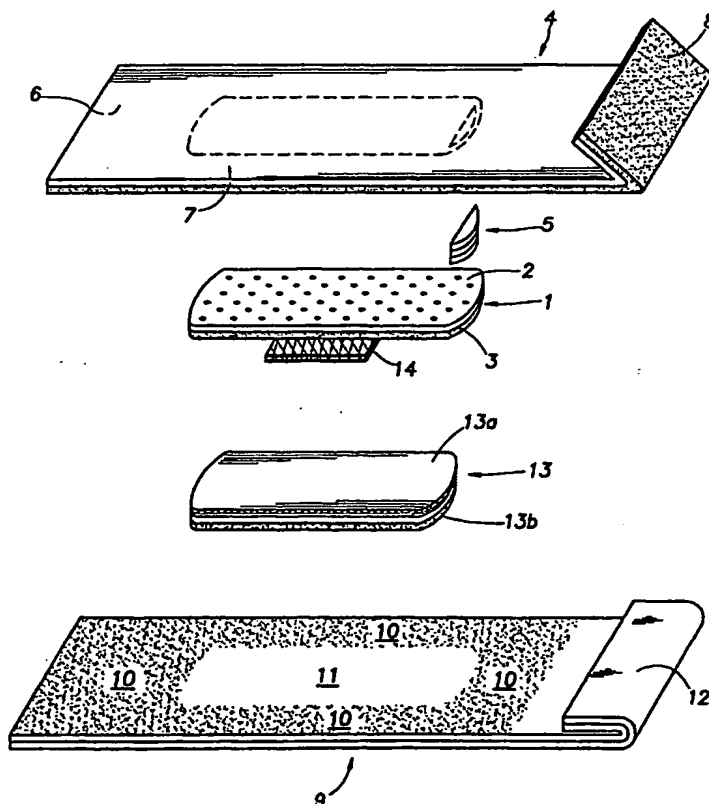

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

PACKAGING FOR ADHESIVE-BANDAGE TO ALLOW ONE-HANDED APPLICATION

This Application claims the benefit of U.S. Provisional Application No. 60/109,701, filed November 24, 1998.

Background of the Invention**5 Field of the Invention**

The invention relates to the packaging and application of adhesive-sided articles such as adhesive bandages, medical tapes, and the like.

Description of the Prior Art

Individually packaged adhesive-sided articles have been in use for many decades.

10 Of these, perhaps the best known example is the adhesive bandage such as the one marketed by Johnson & Johnson under the famous BAND-AID® trademark. The packaging of this product and many others like it consists of an outer envelope or sleeve that must be opened to extract the product, as well as one or more pieces of release material that must be removed from the product itself to expose the adhesive. However,

15 a significant difficulty arises in using such products in situations where the user does not have both hands free to unwrap and apply the bandage. For example, a worker who suffers a serious cut on one finger or hand would find it virtually impossible to apply a standard adhesive bandage quickly because he would have to use both hands to unwrap the bandage but could not possibly use both to apply it. Similarly, a person who must

20 inject himself (or someone else) with medication or draw a blood sample would doubtless prefer to hold a gauze pad against the puncture with one hand while applying a bandage or adhesive tape over the gauze. The difficulty of application is aggravated where the bandages are stored in a cardboard or metal box or other closed receptacle, for an injured user might contaminate multiple wrapped bandages while attempting to extract one from

the receptacle. In view of the well-documented frequency of hand and finger injuries in both the home and workplace, there is clearly a need for adhesive bandages that the user can obtain, unwrap and apply quickly while using only one hand.

5 Matters are further complicated for health care professionals, who are subject to OSHA requirements that mandate the use of latex gloves during all activities which involve a risk of exposure to blood. Traditional adhesive bandages adhere tenaciously to latex, making it difficult to apply them using two gloved hands, much less with only one.

At the same time, however, it is essential for achieving a complete solution to the problem that the bandage also be maintained in a sterile condition until just before
10 application. Furthermore, the benefit of such precautions is wasted if the user is forced for some reason to touch the sterile dressing while applying the bandage. Typically this occurs while the user is shifting his grip on the bandage, just after unwrapping it but before applying it.

Many solutions have been put forth to address the problems described above.
15 Most solutions have relied on the use of some complex (and expensive) dispensing apparatus that presents a single sterile bandage from the end of a fanfold stack or coiled roll. Some of these also achieve the goal of single-handed application, but these solutions are often especially expensive and cumbersome. Furthermore, most of the solutions that accomplish one-handed application do so by methods that leave a substantial portion of
20 the article secured to its wrapper during application, such as shown in U.S. Patent 4,265,234, Schaar. This attachment makes it difficult to apply the article to cylindrical surfaces (e.g., bandaging a finger) without wrapping the article's adhesive layer back over part of the wrapper.

U.S. Patent 5,511,689, Frank, and Japanese Utility Model Registration No.
25 2,126,815, Kanda, et al., each disclose a package for an adhesive-sided bandage including a bottom sheet and a top sheet, a release paper opposing the adhesive surface of the bandage and adhesive layers of different strengths on the top and bottom sheets and the bandage itself. The weakest adhesive allows the bottom sheet to be removed with the release paper to expose the adhesive side of the bandage while the bandage is adhered to
30 the top sheet. The strongest adhesive is on the bandage so that it can be applied to the

patient's skin for fast holding. An adhesive of intermediate strength holds the top sheet to the top of the entire bandage and gives way to allow removal of the top sheet therefrom after the bandage is secured to the patient's skin.

Neither the Frank package nor the Kanda, et al. package is believed to have been commercialized. Although the package of Frank, and possibly that of Kanda, et al., allows a one-handed application of the bandage to the patient and removal of the top sheet of the package, as shown in Fig. 3 of the Frank patent, there are problems in consistently obtaining the relative adhesive strengths and with having an adhesive layer on the top sheet of the package at the time of application to the patient. Having the relative adhesive strengths in the various relationships as described above is important to permit the package to work properly in the application of the bandage. In addition, it is necessary to have the top sheet adhere to the bottom sheet when the package is stored as well as sterilized, necessitating that the adhesive area is larger than the area of the bandage. In their respective applications, Frank and Kanda, et al. use only one adhesive to not only bond the top sheet to the bandage, but also to bond the top sheet to the bottom sheet to seal the package. In this application, the top and bottom sheets need to peel apart easily while also to stick together firmly enough to seal the package for sterilization purposes. With only one adhesive bonding the top sheet to the top surface of the bandage, this would not be possible. Furthermore, when the bandage and top sheet are pressed onto the skin, the adhesive on the top sheet adheres to the skin and hairs and blemishes thereon. When the top sheet of the package is subsequently removed, the hairs are pulled and the skin imperfections are irritated.

Therefore, it is a feature of the invention to provide a package comprising separable top and bottom layers adhered to each other for enclosing an adhesive bandage or the like, that allows one-handed application of the bandage with its separated top layer being used as the applicator. The applicator is void of any adhesive material that would come in contact with the skin, so when the bandage is applied, the only adhesive that comes in contact with the skin is the adhesive on the bandage itself.

It is another feature of the invention to provide a package comprising separable top and bottom layers adhered to each other for enclosing an adhesive bandage or the like,

that allows the bottom layer to be removed from the top layer and allows the top layer to pop up from the bandage when the bandage is applied to the skin for ease of removal of the top layer.

Summary of the invention

5 The invention pertains to a more convenient and easy-to-use package for enclosing an adhesive-sided article, such as an adhesive bandage so that the adhesive-sided article can be removed from its package and placed on a target area using only a single hand while keeping the article free from contamination. Maintaining the sterile integrity of the article is particularly important for a medical bandage application. The sterile or other
10 article is packaged between two cover sheets, a backing layer and a support layer, that are bonded together; the article is attached at one end to the top cover sheet or support layer. To dispense the article, the user pulls on a tab attached to the top cover sheet. The top cover sheet and the article peel away from the bottom sheet or backing layer, leaving the article in the user's hand with its adhesive exposed. The user may then apply the article
15 directly to a target surface with the same hand and without shifting his grip on the tab. The top cover sheet comes away, or "pops up" from the article except at the single point of attachment, preventing the user from wrapping the article over the top cover sheet and permitting easy removal of the top cover sheet from the back of the article.

20 To permit the above application of the enclosed adhesive-sided article, the enclosing package includes facing bottom backing and top support sheets larger than the article, the opposing faces disposed with cohesive, at least peripheral to the article. A release layer having a non-sticking surface facing the adhesive side of the article is adhered to the backing layer. A small adhesive layer attaches one end of the non-adhesive side of the article to the support sheet.

25 A suitable "match book" dispenser secures packaged articles for ease of storage.

Brief Description of the Drawings

So that the manner in which the above-recited features, advantages and objects of the invention, as well as others which will become apparent, are attained and can be

understood in detail, more particular description of the invention briefly summarized above may be had by reference to the embodiments thereof which are illustrated in the drawings, which drawings form a part of this specification. It is to be noted, however, that the appended drawings illustrate only preferred embodiments of the invention and
5 are therefore not to be considered limiting of its scope as the invention may admit to other equally effective embodiments.

In the drawings:

Fig. 1 depicts a graphically expanded cross-sectional view of the assembled article taken along the length of the article immediately before the top and bottom cover sheets
10 or layers are sealed together.

Fig. 2 shows an exploded view of a packaged adhesive-sided article in accordance with the present invention.

Fig. 3 depicts a cross-sectional view of the assembled article taken along the width of the article after the top and bottom cover sheets are sealed together.

15 Fig. 4 depicts the method of removing the article from the bottom or backing sheet by pulling on the tab of the top or support sheet.

Fig. 5 depicts the application of the article to a target surface showing self-releasing or pop-up feature.

20 Fig. 6 depicts an assemblage of several of the articles of the present invention into a matchbook-like dispenser.

Fig. 7 depicts a similar assemblage with a protective cover to prevent crushing.

Fig. 8 depicts the same assemblage as Fig. 7 with the protective cover opened to dispense the articles.

Fig. 9 depicts a side-edge view of the same assemblage as Figs. 7 and 8.

25 Detailed Description of the Preferred Embodiments

Illustrative preferred embodiments of the invention are described below. In the interest of clarity, not all features of an actual implementation are described in this specification. It will of course be appreciated that in the development of any such actual

embodiment, numerous implementation-specific decisions must be made to achieve the developers' specific goals, such as compliance with system-related and business-related constraints, which will vary from one implementation to another. Moreover, it will be appreciated that such a development effort might be complex and time-consuming, but
5 would nevertheless be a routine undertaking for those of ordinary skill in the art having the benefit of this disclosure.

The present invention is directed to the problem of dispensing and preferably affixing with one hand an adhesive-sided article such as a label strip of tape, a therapeutic patch, an adhesive bandage or a decal. Specifically, the invention disclosed herein
10 improves upon known methods of wrapping, unwrapping and dispensing such articles, many of which require the use of cumbersome, complex, and expensive dispensers. Because such dispensers are costly and take up a great deal of space, there are many locations that cannot be supplied with a dispenser for these articles even though it would be useful to provide one. The present invention, by way of distinction, includes practical
15 embodiments that can easily be implemented in a space scarcely wider than the article being dispensed (less than two or three inches wide at suitable locations) and at extremely low cost. Indeed, as will be explained in more detail below, it is possible to implement the invention in a form that eliminates the dispenser entirely and thus consists exclusively of consumable and disposable components.

Fig. 1 depicts an article packaged in accordance with the present invention. An adhesive-sided article is made up of a backing sheet (1) with a first adhesive (3) disposed on one surface. Typically, the backing sheet for the article includes breathing holes, as shown. In this embodiment, the article is an adhesive bandage: a gauze pad (14) is secured by the adhesive to the backing sheet. The pad may be treated with a
25 biochemically active compound, if desired. Nicotine, for example, may be applied to the pad or saturating the pad for use as a nicotine patch. Nitroglycerine pads are also available for heart patients. It will be apparent, however, that the particular nature or function of the article itself is not an essential component of the present invention, and that other useful articles ranging from medicated patches to decorative decals with appropriate
30 printing and/or colorations may be identically packaged and applied. It will also be

apparent that although Fig. 1 and the other figures depict a generally rectangular article, the principles underlying the present invention are general and articles of nearly any size or shape may be packaged and applied using the technique described herein. Furthermore, the backing sheet may be made of any material appropriate for the task to be performed
5 by the article. Materials such as paper, plastic, fabric, metal foils or layered combinations of the above are well known in tape and bandage applications, but the technique disclosed herein will also work with less flexible articles.

The adhesive-sided article is temporarily applied to a release layer (13) that has a facing area that is at least as large as the adhesive side of the article. Release layer (13)
10 is firmly attached to a central region (11) of the bottom cover sheet (9) or backing layer by either an adhesive or cohesive (13b). This release layer also may consist of a coating applied to all or part of the cover sheet itself, or preferably it may comprise a separate piece of suitable material (13, 13a, 13b) that is attached to the cover sheet at some point during manufacture of the finished product. One material that works well as the release
15 layer is paper coated with silicone (13a) on the side facing the article. A paper strip with an appropriate cohesive for use as a release layer is available from Emtech of Medina, Ohio.

The bottom cover sheet is longer and/or wider than adhesive-sided article (1). This excess length and/or width forms edge regions (10) on the cover sheet bordering the
20 article. Where it is necessary or desirable to maintain the article in a sterile condition, it is thus possible to provide a releasable hermetic seal peripherally around the article by sealing all of the edges (6,7) of the top cover sheet support layer (4) to the edges (10) of the bottom cover sheet. Additional excess length of the bottom cover sheet may also be provided at one end as an anchoring or tab region (12) that may be used to hold the
25 bottom cover sheet fixed during application of the article or (as described in more detail below and shown in Fig. 6) as a location at which a fastener can hold a stack of the packaged articles together without interfering with their sealed compartments.

The article is covered from above by a top cover or support sheet (4) that also functions as the applicator of the article. The top cover sheet may be made of any
30 convenient packaging material such as paper or plastic. In particular, the top cover sheet

may be made of a transparent or translucent material in order to facilitate accurate placement of the article if such accuracy is important. This might be useful, for example, where the article is a bandage or surgical tape to be applied to a cut or incision, or where the article is one of several to be applied in close alignment on a common surface, such as letter or numeral decals on a mailbox.

The top cover sheet is longer and/or wider than the article, as is the bottom cover sheet, in order to provide end edge regions (6) or side edge regions (7) (or both) for sealing the top cover sheet to the bottom cover sheet around the article. Where there is no particular need for a sterile closure around the article, it is not necessary to provide all of the edge regions of the top and bottom cover sheets. For example, one could eliminate the side edge regions of both cover sheets, leaving a package held together at its ends by first adhesive (3), second adhesive (5), and the seal formed at the end edge region (6) farthest from the second adhesive. Similarly, it would be possible to eliminate the end edge region farthest from the tab (8), leaving the package held together by bonds in the side edge regions (7).

The top and bottom cover sheets are preferably secured together by treating each with a nonadhesive bonding material (a "cohesive") that adheres only to other surfaces coated with the same material, but does not adhere to untreated surfaces such as the backing sheet. This choice facilitates assembly of the packaged article because it allows the entire inside surface of the top and bottom cover sheets to be coated with cohesive without concern that the adhesive-sided article might adhere to the top cover sheet. Thus, layer (15) is disposed on the bottom of sheet (4) and layer (16) is disposed on the top of sheet (9). To accomplish the same objective with an adhesive bonding material would require precise application of the adhesive along only the edges of the cover sheets. The application of too much adhesive would cause the article to adhere too strongly to the top cover sheet; use of too little would tend to result in gaps in the closure that would render the package unsuitable for sterile applications. Paper having a suitable cohesive attached thereto and separate cohesive material is available from Bonarko located in Plymouth, Indiana. A suitable cohesive material is available from A. T. O. Findley and is known as Cold Seal.

The lengthwise end (2) of the article (that is, an end of the article along its longest dimension) closest to the anchoring region (12) of the bottom cover sheet is releasably attached to the top cover sheet by a narrow strip of a second adhesive component (5). Anchoring region or tab (12) is created by folding the extended end of sheet (9) over on
5 itself so that two cohesive surfaces face and adhere to each other. This adhesive component is selected so that the article will adhere to the top cover sheet (4) when the top and bottom cover sheets are separated, and also so that the top cover sheet will detach easily from the article once the article is delivered and affixed to a target surface. One method for achieving this selectivity is to employ a small piece of backing material such
10 as cellophane coated with two adhesives (5a) and (5b) of different tack, one on each side. Adhesive materials (5a) and (5b) on double-sided backing (5) are preferably about as strong as adhesive material (3) on adhesive-sided article (1). Preferably, the bond can be even a little stronger since the area of tape or layer (5) is small relative to the area of the adhesive side of article (1) that is to be placed on the receiving surface of the patient or
15 other target surface. When the top support sheet is removed from the adhesive-sided article, it is grasped at the end that has popped up or that is not adhered to the article and pulled lengthwise, not straight up. Thus, layer (5a) releases from article (1) without causing the adhesive of article (1) to pull-away from the receiving surface.

The two adhesives (5a) and (5b) can be selected so that the stronger adhesive
20 faces the top cover sheet to ensure that when the top cover sheet is removed, the second adhesive component will be removed with it rather than adhering to the backing sheet. In other words, adhesive layer (5a) is preferably stronger than adhesive layer (5b). A source for such tape with appropriate adhesive layers is Tapes & Tech Solutions located in Nashville, Tennessee. Although the area of component (5) is illustrated as being
25 relatively small with respect to the area of the article, it may be quite large. Alternatively, component (5) can be a glue or other adhesive applied directly to the area occupied in the illustration by the backing material just described for component (5).

A pull tab (8) is formed by extending a segment of the top cover sheet beyond the previously described end edge region (6) at the same end of the article at which the top
30 sheet is attached by the second adhesive (5) and at which the anchoring region (12)

extends from the bottom cover sheet. The tab is folded under or toward the article and away from the anchoring region so that the top cover sheet may be peeled away from the bottom cover sheet by pulling on the tab while the anchoring region or tab (12) is held stationary. Because the facing portions of the sheet forming the tab are both disposed with cohesive, the two portions seal on each other. It will be apparent that the tab (8), the second adhesive (5) and the anchoring region (12) must all be located at the same end of the article in order for this peeling action to detach the article from the release layer (13) of the bottom cover sheet while keeping the article attached to the top cover sheet. It is possible, however, to locate the anchoring region adjoining the side edge (7) instead of the end edge (6) as long as the anchoring region at least adjoins that portion of the side edge next to the end edge beyond the second adhesive (5). In particular, one could assemble a number of articles into a coiled roll with the tabs of the top cover sheets at the sides of the coil, so that an article is dispensed by pulling the article's tab across the width of the roll rather than along its length.

Although Fig. 1 is expanded and exaggerated for illustration purposes, it will be apparent that Fig. 1 depicts a longitudinal cross-section of the adhesive-sided article and its packaging, just before the top and bottom cover sheets are sealed together. In making up the package, one could also provide a second release surface on the side of the top cover sheet facing away from the second adhesive. Of course, it would have some affinity to bond with adhesive layer (5). This modification would permit one to construct a stack of articles separated by single intermediate cover sheets, each article's bottom cover sheet serving also as the top cover sheet/applicator for the article immediately below it in the stack.

Fig. 3 depicts a partial cross-section of the same article through its width, taken just after the cover sheets are sealed together.

Fig. 4 depicts the first step in applying the article. By pulling tab (8) away from the bottom cover sheet and away from anchoring region (12), the user simultaneously removes the article from its packaging and exposes its adhesive (3) for application to the target surface. The second adhesive or layer (5) secures one end of the article to the top cover sheet during this operation.

In Fig. 5, the article is delivered to target surface (20). The top cover sheet (4) is attached to the article only by a small amount of adhesive material (5) at the top surface of the article's lengthwise end (2), as previously discussed. The cover sheet may thus be easily detached from the article once the article is fixed to the target surface by its adhesive (3). In addition, the action of applying the article tends to cause the top cover sheet to "self-release" or "pop up" — that is, to curl upward and away from the article, further facilitating removal of the top cover sheet. This self-release action is particularly important where the article is to be applied to a small cylindrical surface (such as bandaging a finger or labeling a wire or pipe) because this mechanism prevents the user from wrapping the article's back over the top cover sheet, which would make the cover sheet extremely difficult to detach. It will be appreciated that the present invention obviates any need for the user to change his grip on the top cover sheet during application of the article. This tends to reduce the likelihood that the article will fold and adhere to itself in a way that might complicate application. In addition, the ability to apply the article without altering one's grip would allow a user to secure the article easily to a point beyond his normal reach by using a surgical clamp, needle-nose pliers or the like to grasp the tab of the top cover sheet throughout the operation. In the case of bandages and other medical articles, a significant opportunity for contamination of the sterile surface is also eliminated. Finally, the present invention eliminates any need for the user to touch the adhesive on the backing sheet. This further facilitates application and makes it possible, for example, to dispense and apply the article while the user is wearing latex or other rubber gloves.

Fig. 6 depicts a stack of the packaged articles assembled to form a convenient dispenser. In the figure, the articles are simply stapled together through the anchoring regions (12) of each bottom cover sheet (9); but numerous other known methods of fastening several articles together at their anchoring regions, such as applying adhesive to the faces or edges of these regions or simply mechanically clamping the articles with a binder clip, may be employed without departing from the scope of this disclosure. By adding a mounting hole (18), it becomes possible to hang the assembly from a spindle, nail, hook, or other projection at a dispensing station. When the assembly is thus

suspended, true one-handed dispensing and application of the articles becomes possible because the anchoring region of each article's bottom cover sheet is held in place by the hanging hardware. This embodiment of the invention might be especially useful in hospitals, where the need for bandages is frequent and IV stands are readily available; but
5 it will be apparent that similar assemblies may be used in any location where it is desirable to have several adhesive-sided articles readily available for application. It should also be apparent that this embodiment effectively obviates any need for a permanent dispenser, since the dispensing assembly consists of only the articles themselves, their consumable or disposable packaging materials, and one or more inexpensive fasteners.

10 It may be desirable, however to provide the assembly with a folded reclosable cover (17), as shown more clearly in Figs. 7 and 8, to protect the articles from crushing or contamination, and to make the assembly convenient to carry in a pocket. The addition of a cover provides additional options for mounting the assembly at a dispensing point, such as the application of double-sided adhesive to the back of the cover or the attachment
15 of a hanging loop or similar device at the end of the assembly where the articles are fastened together.

The process for manufacturing the packaged adhesive-sided articles of the present invention proceeds in two sets of steps. The first set of operations prepares each of the five or six components of the packaged article (top and bottom cover strips, release layer
20 or liner, backing sheet with first adhesive, second adhesive, and optionally a pad) for assembly into the finished product. These steps may be carried out simultaneously or sequentially and in any order. The top and bottom cover sheets are prepared for assembly by coating one side of each with the cohesive material described above. The backing material of the article itself is coated with adhesive on one side and, for ease in handling,
25 is backed with a temporary release paper that is not part of the finished product. This backing material may also be perforated with breathing holes at this point. The release liner is coated first with a silicone on one side, then with adhesive or cohesive on the other side. All four of these components, and the pad if one is to be applied, are typically furnished in continuous rolls far wider than the process requires and must therefore be cut
30 to appropriate widths before assembly. After cutting, a nonstick tab is formed on one

edge of each cover sheet by folding the edge over on itself so that the cohesive material contacts itself. The second adhesive is performed by applying two adhesive layers to opposite sides of a substrate as described above.

5 The second set of operations assembles the prepared components into the finished packaged product. Although the process is best carried out by using continuous production machinery, it may also be performed batchwise from appropriate starting materials without altering the function of the completed product. The backing sheet is separated from its temporary release paper and the pad material is mounted on the first adhesive. The silicone-coated face of the release liner is applied to the first adhesive over
10 the pad, leaving the adhesive-coated or cohesive-coated side exposed. The second adhesive is applied to a precise location on the back of the backing sheet (that is, the side not treated with the first adhesive), and the entire assembly is die-cut to produce articles of the desired shape and size, such that the location where the second adhesive was applied becomes the end of the article. Finally, the top and bottom cover sheets are
15 applied with pressure. This operation forms a seal of cohesive material around the article, attaches the release liner to the bottom cover sheet, and secures the top cover sheet to the second adhesive on the end of the backing sheet. The resulting assembly consists of a continuous sheet of packaged articles that may be separated into individual packages or perforated to permit such separation later.

20 Numerous minor variations in the order of the manufacturing steps may be made without affecting the quality or function of the resulting product, but it is essential for proper operability of the finished product that the second adhesive not extend beyond the backing sheet onto the bottom cover sheet.

25 It will be apparent to one of ordinary skill in the art that many changes or modifications may be made to the invention described above without departing from the spirit or scope of the appended claims.

WHAT IS CLAIMED IS:

1. A packaged article for one-handed application, comprising
an adhesive-sided article having top and bottom surfaces and an adhesive disposed
on at least a portion of said bottom surface,
a bottom backing sheet having a top surface larger than said adhesive-sided article
5 and a cohesive disposed on said top surface,
a release layer having top and bottom surfaces at least as large as said adhesive-
sided article, a non-sticking substance disposed on said top surface, and
an adhesive or cohesive disposed on said bottom surface for adhering said
release layer to said bottom backing sheet,
10 a top support sheet having a bottom surface larger than said adhesive-sided article
and a cohesive disposed on said bottom surface, and
an adhesive layer for attaching to a portion of one end of said top surface of said
adhesive-sided article and to a portion of said bottom surface of said top
support sheet,
15 said bottom surface of said top support sheet enclosing said adhesive-sided article
by adhering to that portion of said bottom backing sheet that is larger than
said release layer,
whereby, said bottom backing sheet and release layer are removed together to expose said
bottom surface of said adhesive-sided article for application to a receiving surface after
20 which said top support sheet is removed from said adhesive-sided article.

2. A packaged article in accordance with claim 1, wherein said bottom
backing sheet includes a tab for anchoring while said top support sheet and said adhesive-
sided article are removed from said bottom backing sheet and said release layer.

3. A packaged article in accordance with claim 1, wherein said tab is formed
by an extension of said top support sheet being folded under so that a portion of the
cohesive disposed on said bottom surface thereof adheres to itself.

4. A packaged article in accordance with claim 1, wherein said top support sheet includes a tab for removal thereof from said adhesive-sided layer after application thereof on the receiving surface.

5. A packaged article in accordance with claim 1, wherein said tab is formed by an extension of said bottom backing sheet being folded over so that a portion of the cohesive disposed on said top surface thereof adheres to itself.

6. A packaged article in accordance with claim 1, wherein said adhesive-sided article is a bandage having a bandage backing and a sterile pad adhesively attached to a portion thereof.

7. The packaged article of claim 1, further comprising a biochemically active compound applied to said sterile pad.

8. A packaged article in accordance with claim 1, wherein said top side of said adhesive-sided article includes a printing or coloration.

9. A packaged article in accordance with claim 1, wherein said release layer is adhered to said bottom backing sheet so as to peripherally expose a portion of said cohesive disposed on said top surface of said bottom backing sheet.

10. A packaged article in accordance with claim 1, wherein said non-sticking substance disposed on said top surface of said release layer is silicone.

11. A packaged article in accordance with claim 1, wherein said adhesive layer is a double-sided tape having top and bottom surfaces and adhesive disposed on both said top surface and on said bottom surface.

12. A packaged article in accordance with claim 11, wherein the adhesive bond of said adhesive layer with the bottom surface of said top sheet is stronger than the adhesive bond of said adhesive layer with the top surface of said adhesive-sided article.

13. A packaged article in accordance with claim 1, wherein said adhesive layer has a stronger bond with said top support sheet than the bond between said adhesive-sided article and said release layer.

14. The packaged article of claim 1, wherein said bottom backing sheet further comprises an anchoring region.

15. The packaged article of claim 13 wherein said anchoring region comprises at least one additional packaged article enclosing an adhesive-sided article.

16. The packaged article of claim 1 wherein at least a portion of said top cover sheet is transparent.

17. The packaged article of claim 1 wherein at least a portion of said top cover sheet is translucent.

18. An apparatus for dispensing the packaged adhesive-sided articles of claim 1, comprising:

a plurality of said packaged adhesive-sided articles; and

a fastener securing said anchoring portions of said bottom cover sheets together,

5 wherein said fastener does not secure said top cover sheets or said tabs.

19. The apparatus of claim 18, further comprising a reclosable cover at least partially enclosing said packaged articles, wherein said fastener secures said reclosable cover to said bottom cover sheets.

20. The apparatus of claim 18, further comprising a fastener securing said apparatus to a surface.

21. The apparatus of claim 18, wherein each of said bottom cover sheets is detachable from said fastener.

22. A method for one-handed application of the packaged adhesive-sided article of claim 1, comprising:

- 5 (a) detaching said bottom backing sheet from said top support sheet so that a portion of said adhesive-sided article remains attached to said top support sheet;
- (b) applying said top support sheet with said adhesive-sided article to a target receiving surface by adhering said adhesive disposed bottom surface of said adhesive-sided article thereto, said cohesive disposed bottom surface of said top support sheet contacting but not adhering to the receiving surface; and
- 10 (c) detaching said top support sheet from said adhesive-sided article.

23. The method of claim 22, wherein said top support sheet curls away from said adhesive-sided article during application.

24. A method for manufacturing packaged adhesive-sided articles adapted for one-handed application, comprising:

- (a) coating a first side of a sheet of release paper with silicone;
- (b) coating a second side of said sheet of release paper with a first layer of a cohesive material;
- 5 (c) applying an adhesive-sided article, comprising a backing sheet having a first adhesive disposed on the bottom side of said backing sheet;
- (d) matching said first side of said release paper with the bottom side of said backing sheet;

- 10 (e) applying a second adhesive material to a portion of the top side of said adhesive-sided article adjacent to a lengthwise end thereof and forming a releasable bond with said article;
- (f) applying a second layer of cohesive material to the bottom side of a top support sheet;
- 15 (g) overlaying said top support sheet over said adhesive-sided article and forming a releasable bond with said second adhesive material;
- (h) applying a third layer of said cohesive material to the top side of a bottom backing sheet;
- (i) securing said second side of said sheet of release paper to said top side of said bottom backing sheet by contacting said first and third layers of said cohesive material; and
- 20 (j) releasably securing said top cover sheet to said bottom cover sheet.

25. The packaged adhesive-sided article manufactured by the method of claim 24.

26. The method of claim 24, further comprising mounting a pad on said adhesive-sided article before matching said article to said release sheet.

27. The method of claim 24, wherein the bond with said second adhesive material to the bottom side of said top support sheet is stronger than the bond of said second adhesive material with said adhesive-sided article.

28. The method of claim 24, wherein said adhesive-sided article comprises an adhesive bandage.

29. The method of claim 24, wherein said adhesive-sided article further comprises a pad mounted on said first adhesive.

30. The method of claim 29, wherein said pad comprises a biochemically active material.

31. The method of claim 29, further comprising disposing a biochemically active material on said pad.

32. The method of claim 29, further comprising disposing a biochemically active material within said pad.

33. The method of claim 32, wherein said biochemically active material is nicotine.

34. The method of claim 32, wherein said biochemically active material is nitroglycerine.

35. An apparatus for dispensing and applying adhesive-backed articles, comprising:

- 5 a plurality of adhesive-sided articles, each comprising a backing sheet having first and second sides, a length at least equal to its width, and a lengthwise end, and a first adhesive disposed on said second side of said backing sheet;
- a bottom cover sheet having a surface comprising a central region having at least the same length and width as said backing sheets, an end edge region extending beyond the length of said central region, and a first pair of side edge regions extending beyond the width of said central region;
- 10 a first release layer at least as long and at least as wide as said backing sheets and having third and fourth sides, said third side being releasably secured to said second side of one of said backing sheets by said first adhesive, and said fourth side being secured to said central region of the surface of said bottom cover sheet;

- 15 at least one intermediate cover sheet, longer and wider than said backing sheets
and having fifth and sixth sides, said sixth side of said intermediate cover
sheet being releasably bonded to a portion of said first side of said one of
said backing sheets at said lengthwise end by a second adhesive material,
said fifth side having a central region at least as long and at least as wide
20 as said backing sheets, having a second pair of side edge regions extending
beyond the width of said one of said backing sheets, and having an end
edge region extending beyond the length of said one of said backing sheets
at a point opposite to said lengthwise end; and
a second release layer at least as long and at least as wide as said backing sheets
25 and having seventh and eighth sides, said seventh side being releasably
secured to said second side of another of said backing sheets by said first
adhesive, and said eighth side being secured to said central region of the
fifth side of said intermediate cover sheet.

1/4
FIG. 1



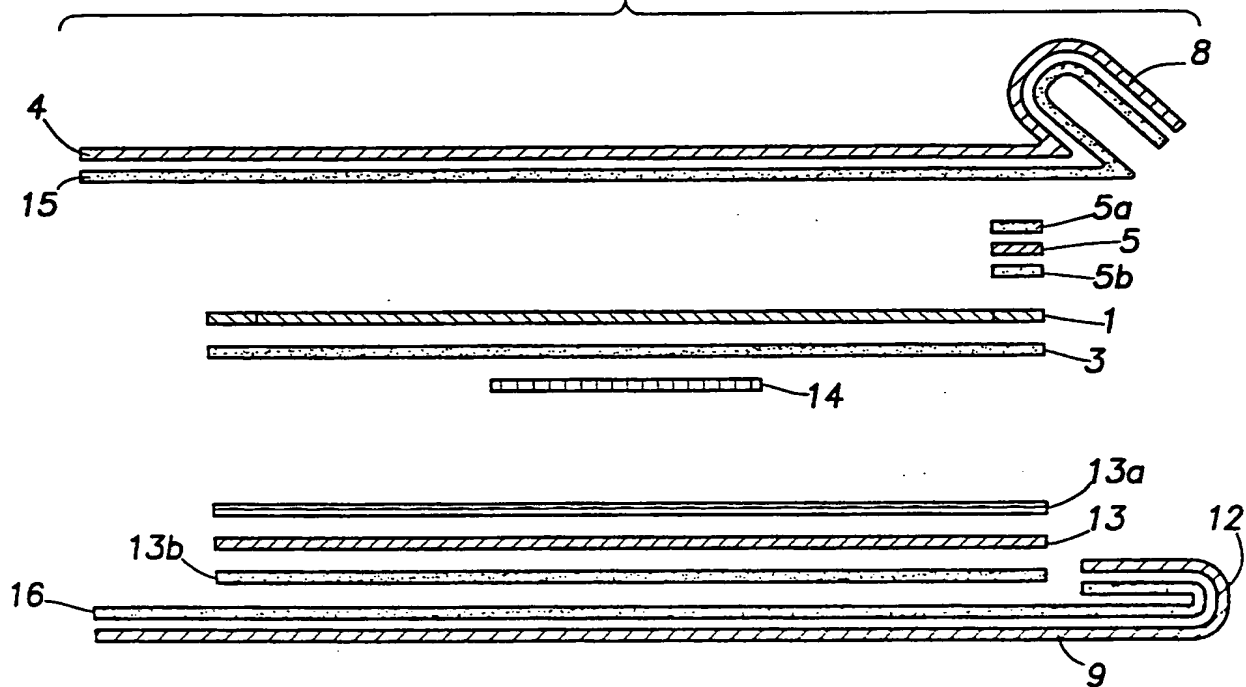


FIG. 6

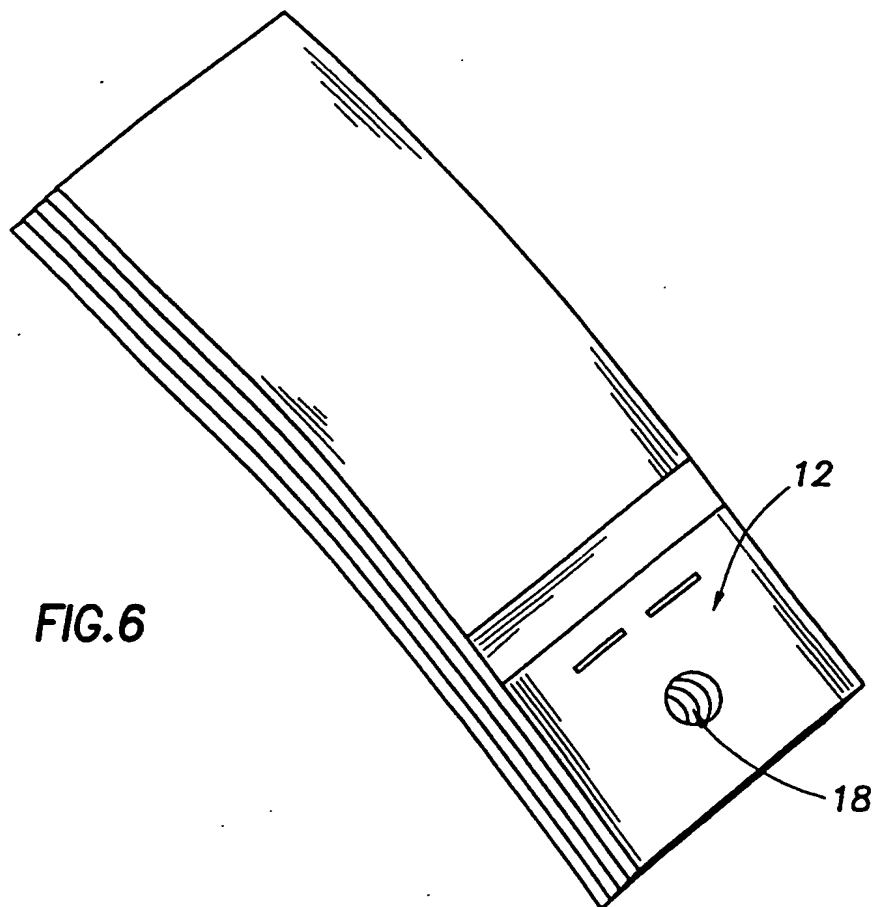

2/4

FIG.2

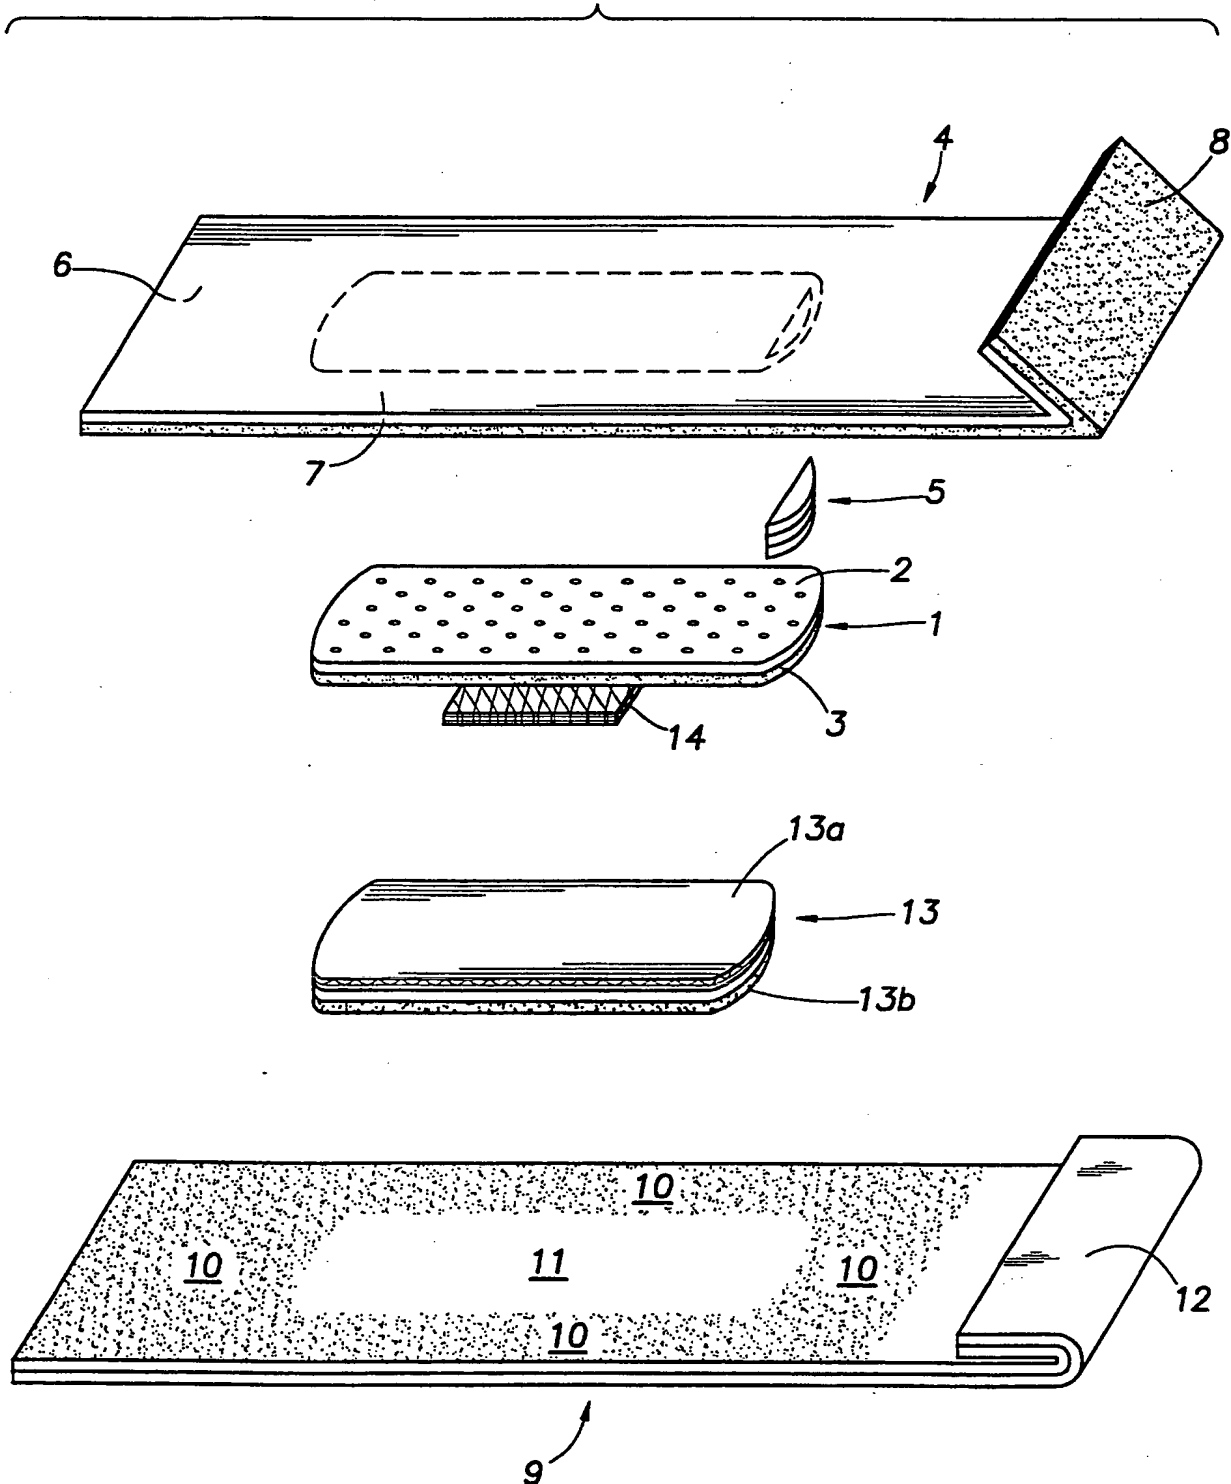

3/4

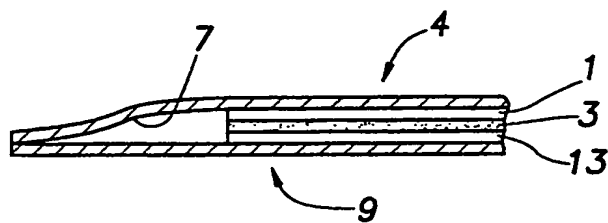


FIG. 3

FIG. 4

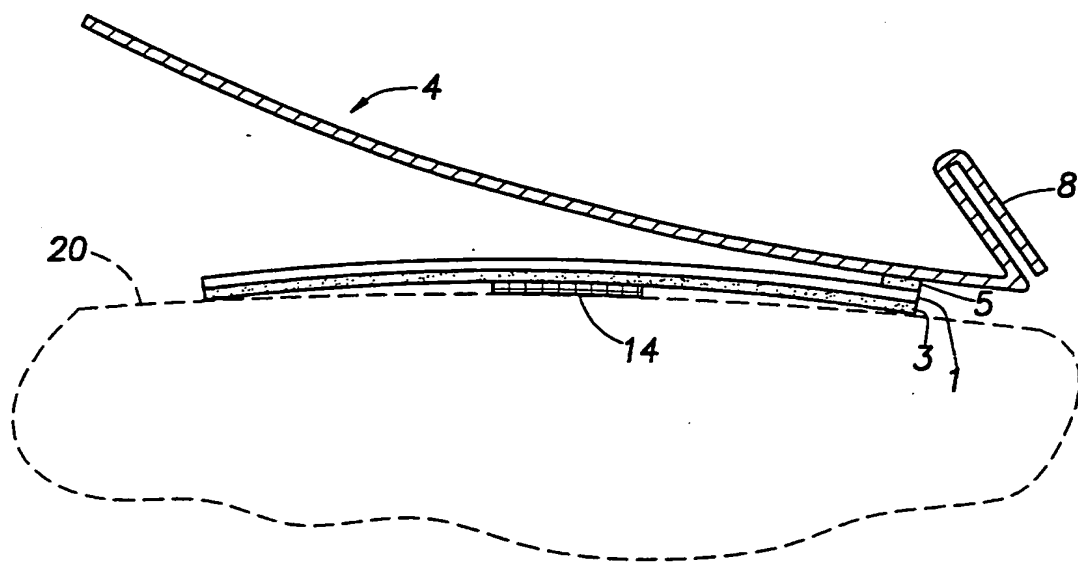
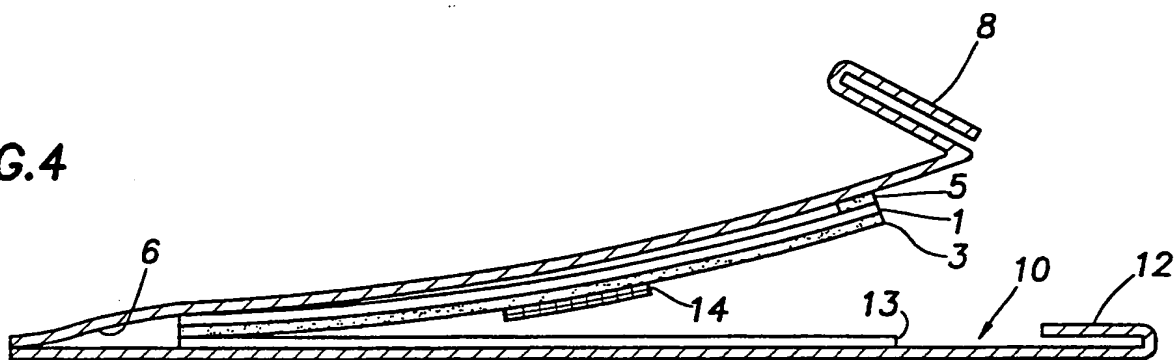


FIG. 5

FIG.7



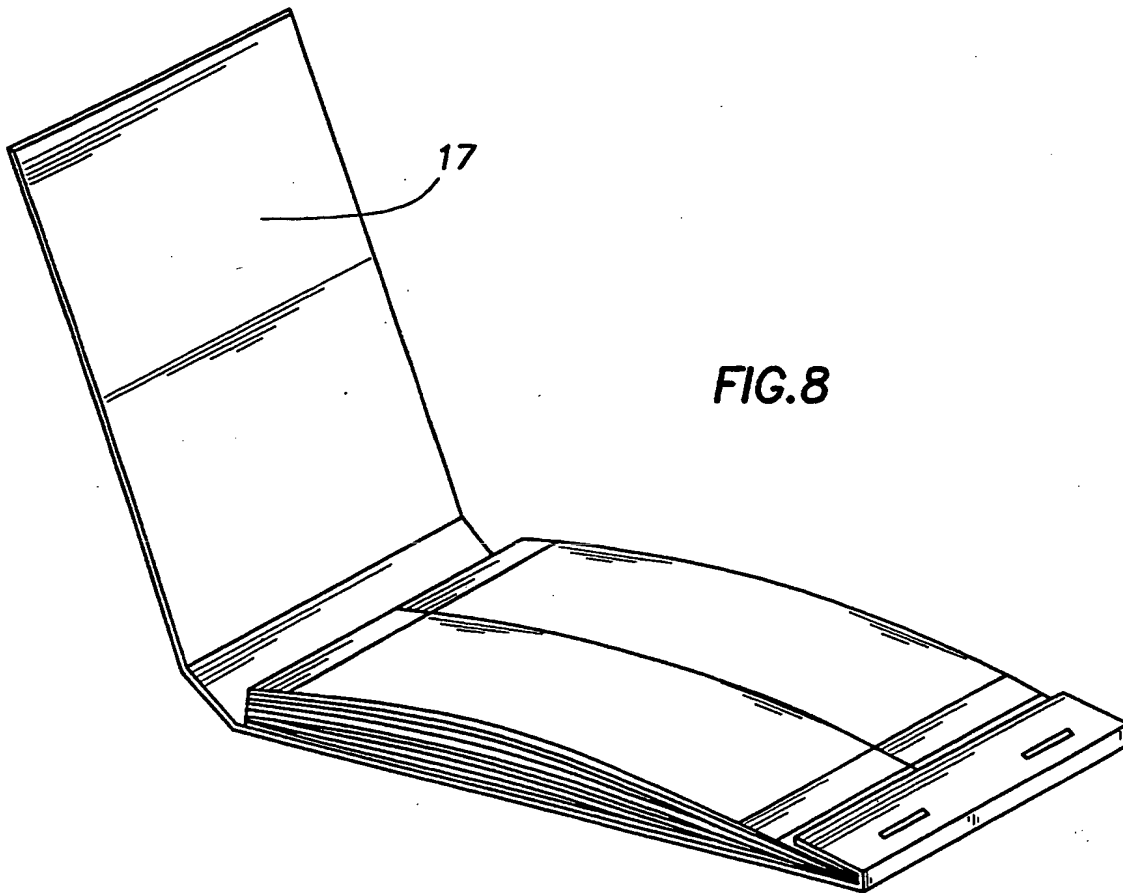


FIG.9

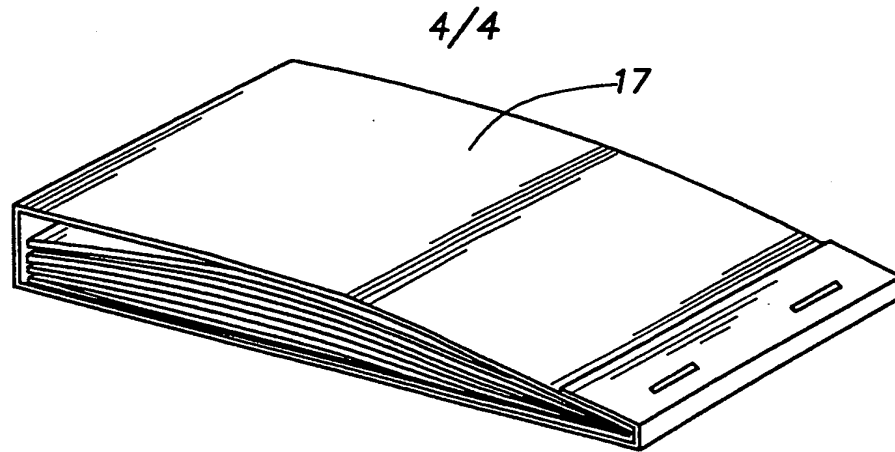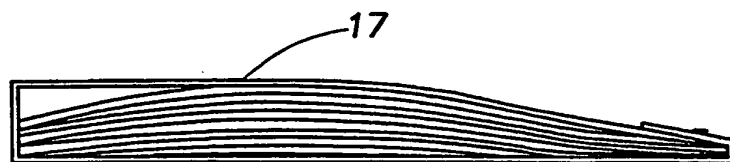

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/26298

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61F13/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 98 38955 A (MINNESOTA MINING AND MANUFACTURING COMP) 11 September 1998 (1998-09-11) page 6, line 13-27 page 9, line 7-27 page 14, line 25 -page 15, line 4; figures 1,10,11	1-7, 9, 10
A	US 5 722 943 A (ROBERT SESSIONS) 3 March 1998 (1998-03-03) column 6, line 5-39 column 7, line 62 -column 8, line 47 column 9, line 17 -column 10, line 4; figures 1-6,13	1,4,6,7, 16
	-/-	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

6 March 2000

Date of mailing of the international search report

16/03/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentplan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax (+31-70) 340-3018

Authorized officer

Seabra, L

INTERNATIONAL SEARCH REPORT

International Application No
PCT/US 99/26298

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2 969 145 A (GEORGE HANNAUER, JR) 24 January 1961 (1961-01-24) column 4, line 53 -column 5, line 33; figures 1-5	1,2,4,6, 16
A	DE 43 14 834 A (BEIERSDORF AG) 10 November 1994 (1994-11-10) column 4, line 9-30; figures 1,2	1,2,4,16
A	US 4 265 234 A (CHARLES SCHAAAR) 5 May 1981 (1981-05-05) cited in the application abstract; figures	1-6
A	GB 2 157 955 A (SMITH AND NEPHEW ASSOC. COMP.) 6 November 1985 (1985-11-06) abstract; figures 2,4	1,2,4

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/US 99/26298

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9838955 A	11-09-1998	US 6018092 A AU 3593597 A EP 0971661 A	25-01-2000 22-09-1998 19-01-2000
US 5722943 A	03-03-1998	US 4884563 A	05-12-1989
US 2969145 A	24-01-1961	NONE	
DE 4314834 A	10-11-1994	NONE	
US 4265234 A	05-05-1981	CA 1163242 A	06-03-1984
GB 2157955 A	06-11-1985	NONE	

THIS PAGE BLANK (USPTO)